




// ONE BRAND // ONE SOURCE // ONE SYSTEM

*The Original*  
since 1923

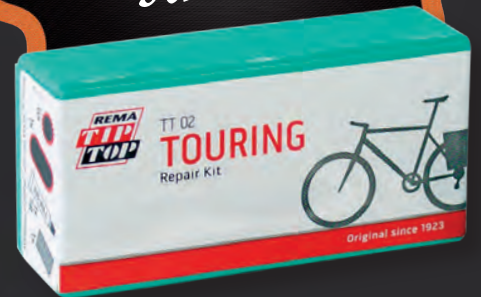

REMA TIP TOP  
BICYCLE CATALOGUE



**BICYCLE TUBE REPAIR? YES, FOR SURE!**

So that your journey can quickly resume after a puncture

## CONTENT



REMA TIP TOP

Tyre and Tube Repair	<b>4-9</b>
Tyre and Tube Repair/Accessories	<b>10-11</b>
Tyre and Tube Repair/Self-service products	<b>12</b>
Tyre and Tube Repair/REP & AIR	<b>13</b>
Tyre and Tube Repair/Tyre sealants	<b>14-15</b>
Outdoor repair material	<b>16</b>
Mounting stands	<b>17-18</b>
Ceilinglift	<b>19</b>
Mounting stands accessories	<b>20-22</b>
BATTERY LOCKER	<b>23-25</b>
Charging boxes	<b>26-27</b>
Compressor	<b>28</b>
Compressed air accessories	<b>29-30</b>
Tyre inflators & Tyre pressure gauges	<b>31</b>
Bicycle valves	<b>32</b>
Bicycle valve adapters	<b>33</b>
Workplace mats	<b>34-35</b>
Protecting, cleaning and caring	<b>36-38</b>




## TYRE AND TUBE REPAIR

### TUBE PATCHES, RED EDGE

REMA TIP TOP Tube patches with double-scalloped edge applied with REMA TIP TOP SVS-VULC vulcanizing fluid ensure perfect bonding through vulcanization

- Due to the stepped multi-layer structure of the Tube patch body they stretch evenly in all directions when the Tube is inflated
- They leave no edges on the repair area

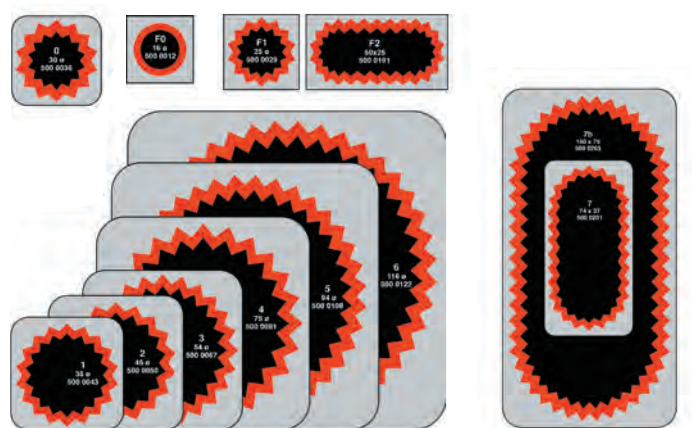

Ref. No.	Description	Size mm	Content	Qty					
500 0012	Tube patches F 0	Ø 16	100	5	•				
500 0029	Tube patches F 1	Ø 25	100	5	•				
500 0191	Tube patches F 2	50 x 25	100	6	•				
500 0036	Tube patches No. 0	Ø 30	100	6	•	•	•		
500 0043	Tube patches No. 1	Ø 35	30	6	•	•	•		
500 0050	Tube patches No. 2	Ø 45	30	6		•	•		
500 0067	Tube patches No. 3	Ø 54	30	6			•	•	•
500 0081	Tube patches No. 4	Ø 75	30	3			•	•	•
500 0108	Tube patches No. 5	Ø 94	10	1			•	•	•
500 0122	Tube patches No. 6	Ø 116	10	1			•	•	•
500 0201	Tube patches No. 7	74 x 37	30	6		•	•		
500 0263	Tube patches No. 7B	150 x 75	10	1			•	•	
506 7103	Tube patch strips TT 02, for bicycles, in paper sleeve		50	1	•				
506 7048	Tube patch strips TT 04, sport, in paper sleeve Extra thin Tube patches for racing bike tyres		50	1	•				

### VULCANIZING FLUID

The basis for bike repair

- Free of CHC/aromatic compounds
- For the vulcanization of Tube patches, valve patches, fabric-reinforced valve patches and rubber base valves (hot vulcanization)

Ref. No.	Description	Content	Qty
505 9025	Vulcanizing fluid	3 g Tube	10
505 9032	Vulcanizing fluid	5 g Tube	50
505 9056	Vulcanizing fluid	10 g Tube	50
505 9128	Vulcanizing fluid	25 g Tube	50
505 9142	Vulcanizing fluid	50 g Tube	25
505 9159	Vulcanizing fluid	70 g Tin, with brush top	25
505 9197	Vulcanizing fluid	175 g Tin, with brush top	25
505 0196	Vulcanizing fluid	175 g Tin	25
505 9245	Vulcanizing fluid	500 g Tin	10



similar pictures

## TYRE AND TUBE REPAIR

### BICYCLE REPAIR KIT TT 01

The basic kit for bicycle tyre repair

Ref. No.	Description	Qty
506 0007	Bicycle repair kit TT 01	36
506 4003	Bicycle repair kit TT 01 with self-service clip <b>Scope of delivery:</b> 4 Tube patches size F1 1 Tube patch size F2 1 Tube of SVS vulcanizing fluid 3 g 1 Emery paper with special rubberpad 1 Manual	10



### BICYCLE REPAIR KIT TT 02

The 'No. 1' among the bicycle repair kits

Ref. No.	Description	Qty
506 0100	Bicycle repair kit TT 02	24
506 4106	Bicycle repair kit TT 02, with self-service clip	10
507 9892	Bicycle repair kit TT 02, in dispenser box	20
506 9163	Bicycle repair kit TT 02, retro	1
506 9190	Bicycle repair kit TT 02, retro limited edition <b>Scope of delivery:</b> 6 Tube patches size F1 1 Tube patch size F2 1 Tube of SVS vulcanizing fluid 5 g 1 Emery paper with special rubberpad 1 Manual	1

similar pictures

## TYRE AND TUBE REPAIR

### BICYCLE REPAIR KIT TT 03

Completely new repair kit containing self-adhesive Tube patches.

Ref. No.	Description	Qty
506 0030	Bicycle repair kit TT 03 quick patch, in dispenser box	24
506 4030	Bicycle repair kit TT 03 quick patch, with self-service clip <b>Scope of delivery:</b> 6 Self-adhesive Tube patches 1 Emery paper 1 Manual	10



### BICYCLE REPAIR KIT TT 04

Special assortment of extra-thin Tube patches for racing bike professionals.

Ref. No.	Description	Qty
506 0045	Bicycle repair kit TT 04 sport	36
506 4041	Bicycle repair kit TT 04 sport, with self-service clip <b>Scope of delivery:</b> 6 Tube patches size F0 1 Tube of SVS vulcanizing fluid 3 g 1 Emery paper with special rubberpad 1 Manual	10

### BICYCLE REPAIR KIT TT 05

The mobile breakdown kit for the ATB, MTB and frequent cyclist.

Ref. No.	Description	Qty
506 0193	Bicycle repair kit TT 05	16
506 4199	Bicycle repair kit TT 05, with self-service clip <b>Scope of delivery:</b> 2 Tube patches size F1 1 Tube patch size F2 1 Tube patch size O 1 Cover patch F2 blue 1 Tube of SVS vulcanizing fluid 5 g 1 Emery paper with special rubberpad 2 Tyre levers 1 Manual	10

➤ similar pictures

## TYRE AND TUBE REPAIR

### BICYCLE REPAIR KIT TT 06

The ,top-class' deluxe box with CO2 cartridges for fast Inflation.

Ref. No.	Description	Qty
506 0605	Bicycle repair kit TT 06	10
506 4601	Bicycle repair kit TT 06, with self-service clip <b>Scope of delivery:</b> 2 Tube patches size F1 2 Tube patches size F2 2 Tube patches size 1 1 Cover patch F2 blue 1 Tube of SVS vulcanizing fluid 5 g 2 Emery paper with special rubberpad 2 Tyre levers, 2 CO2 cartridges 1 CO2 cartridge adapter 1 Rapid valve, 1 Valve core 1 Collar nut, 1 Valve adapter 1 Slotted valve cap, 1 Manual	10



### BICYCLE REPAIR KIT TT 09

The content of this kit is designed especially for the needs of E-Bike cyclists

Ref. No.	Description	Qty
506 0900	Bicycle repair kit TT09 <b>Scope of delivery:</b> 2 Tube patches size F1 1 Tube patch size F2 1 Tube patch size 0 1 Cover patch F2 blue 1 Tube of SVS vulcanizing fluid 5 g 1 Emery paper with special rubberpad 2 Tyre levers, black 1 Manual 1 Leakfinder 1 Disposable gloves	10



### MOTORCYCLE REPAIR KITS TT 10

Ref. No.	Description	Qty
506 0203	Motorcycle repair kit TT 10	24
506 4209	Motorcycle repair kit TT 10, with self-service clip <b>Scope of delivery:</b> 4 Patches size 0, 1 Patch size F3 1 Tube of SVS vulcanizing fluid 5 g 1 Emery paper with special rubberpad 1 Manual	10



→ similar pictures

## TYRE AND TUBE REPAIR



[similar pictures](#)

### BICYCLE REPAIR KIT TT 15

- The Big Box is perfect for all those who frequently repair or repair many bicycles.
- It belongs in every workshop, at home and on every bicycle tour in the group.

Ref. No.	Description	Qty
506 1500	Bicycle repair kit TT15 <b>Scope of delivery:</b> 10 Tube patches size F0 10 Tube patches size F1 10 Tube patch size O 10 Tube patch size F2 1 Tube repair sheet 100x100mm 1 Tube of SVS vulcanizing fluid 25 g 3 Emery paper with special rubberpad 3 Tyre levers, black 1 Plastic stitcher, black 1 Leakfinder 1 Manual	1



## TYRE AND TUBE REPAIR

### TUBELESS REPAIR KIT TT 13

Tubeless repair kit for tubeless tyres. Also suitable for repair of bicycle tube tyres.

- Universal patches stabilize the tyre casing at the injury and seal the injury
- Further tearing of the damage is prevented

Ref. No.	Description	Qty
506 0160	<p>Tubeless repair kit TT 13</p> <p><b>Scope of delivery:</b></p> <p>3 Repair patches Ø 30 mm, fabric reinforced</p> <p>1 Tube of SPECIAL CEMENT BL (4 g), free of CFC/aromatic compounds</p> <p>1 REMAXX Bike 5g tube</p> <p>1 Emery paper</p> <p>1 Instruction manual</p>	5




### REMAXX BIKE MOUNTING GEL

Special mounting fluid for bicycle tires.

Mounting gel for bicycle tyres, which simplifies the mounting/dismounting of tyres. Simply apply the bike tyre bed and rim. There are no additional tools necessary, as the product is absolutely mild on skin and therefore the brush-in can be performed with the finger without any concerns.

- Suitable for all bicycle tyres
- Transparent gel
- Quick and residue-free dry
- Perfectly integrable in any (REMA Tip Top) repair kit range
- Economical, as very accurate dosing because of the gel-like consistency
- Skin-friendly, Silicone-free and free of mineral oil containing additives

Ref. No.	Description	Content	Qty
593 5670	Remaxx Bike	5 g Tube	50

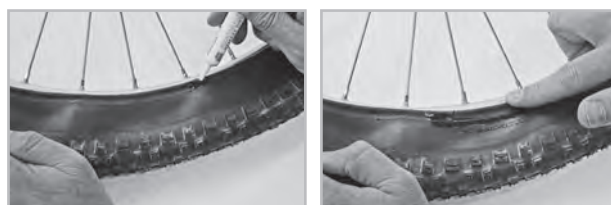

Ideal for on the road!

### REMAXX BIKE MOUNTING FLUID

Special mounting fluid for bicycle tires.

Mounting fluid for bicycle tyres, which simplifies the mounting/dismounting of tyres. Simply apply with the sponge applicator on the bike tyre bead.

- Suitable for all bicycle tyres
- Quick and residue-free dry
- Economical usage
- Simple and clean handling thanks to practical sponge applicator

Ref. No.	Description	Content	Qty
593 5680	Remaxx Bike Mounting Fluid	50 ml sponge can	10



Ideal for the Workshop!

similar pictures

## TYRE AND TUBE REPAIR/ACCESSORIES

### REMAXX UNIVERSAL, WHITE

- For fast, gentle and easy fitting and demounting of all standard tyre/rim combinations
- Chemically neutral with respect to rubber and metal
- Excellent lubrication for mounting and demounting operations = fewer injuries
- Promotes adhesion between rim and tyre, prevents tyre slippage
- Non-spattering

Ref. No.	Description	Content	Qty
593 0591	REMAXX UNIVERSAL	1 kg Bucket	1
593 0601	REMAXX UNIVERSAL	3,5 kg Bucket	1

### MOUNTING PASTE BRUSHES

- The flat brush is especially suitable for mounting low-profile tyres
- Brushes with round head are excellent for application of mounting cream

Ref. No.	Description	brush head	Length of handle	Qty
595 8360	Flat brush car	B: 50 mm	200 mm	1
593 0584	Special brush car	Ø 30 mm	300 mm	1

### TYRE MOUNTING BARS

- Mounting bars made of high-quality plastic
- Distinctly less risk of damage to tyre and rim compared with conventional mounting bars

Ref. No.	Description	Content	Qty
596 0224	Tyre mounting bar, unpacked	100 mounting bars	1
596 4220	Tyre mounting bar, with self-service clip	3 mounting bars per bag	10

### STITCHERS

- For smooth application of repair patches or rubber

Ref. No.	Description	Width	Ø	Qty
596 1027	Stitcher standard, corrugated	4 mm	35 mm	10

### MARKERS

- For labelling rubber items or marking fields of repair patches

Ref. No.	Description	Colour	Qty
595 0045	Marking pen	silber	10



## TYRE AND TUBE REPAIR/ACCESSORIES



### LIQUID BUFFER

- Free of CHC and aromatic compounds
- For quick and easy cleaning and buffing of Tubes
- For chemical cleaning before mechanical buffing

Ref. No.	Description	Content
505 9685	LIQUID BUFFER	250 ml Tin
505 9692	LIQUID BUFFER	500 ml Spray

### UNIVERSAL PATCH UP

- Universal patches (UP) for the repair of small injuries to Tube or Tubeless tyres.

Ref. No.	Description	Dimension	Content		
512 5020	UNIVERSAL PATCH UP 3	Ø 27 mm	100	•	•
512 5040	UNIVERSAL PATCH UP 4,5	Ø 37 mm	100	•	•

### SPECIAL CEMENT BL, FREE OF CHC/AROMATIC COMPOUNDS

- Accelerator solution for the application of REMA TIP TOP RAD, PN and UP repair patches, MINICOMBI, REMA STEM, SV bonding rubber, SEALASTIC, VULC COMPOUND
- SPECIAL CEMENT SC-BL can be universally used for selfvulcanization starting from 18 °C (65 °F) through to hot vulcanization up to 150 °C (300 °F)


Ref. No.	Description	Content
515 9303	SPECIAL CEMENT BL	4 g Tube
515 9327	SPECIAL CEMENT BL	12 g Tube
515 9334	SPECIAL CEMENT BL	30 g Tube
515 9341	SPECIAL CEMENT BL	40 g Tin
515 9358	SPECIAL CEMENT BL	70 g Tube
515 9365	SPECIAL CEMENT BL	225 g Tin

### TALC

- For mounting Tube tyres and as care product/lubricant for rubber articles.
- Fine-grained
- Asbestos free

Ref. No.	Description	Content	Qty
593 0649	Talc	500 g Can	10
593 0687	Talc	25 kg Bag	1




 similar pictures

## TYRE AND TUBE REPAIR/SELF-SERVICE PRODUCTS

### BICYCLE REPAIR KITS

Ref. No.	Description	Qty
506 4003	Bicycle repair kit TT 01, self-service clip	10
506 4106	Bicycle repair kit TT 02, self-service clip	10
506 4030	Bicycle repair kit TT 03, self-service clip	10
506 4041	Bicycle repair kit TT 04 sport, self-service clip	10
506 4199	Bicycle repair kit TT 05, self-service clip	10
506 4601	Bicycle repair kit TT 06, self-service clip	10
506 0900	Bicycle repair kit TT09, self-service clip	10
552 3197	Universal repair kit, self-service clip	10

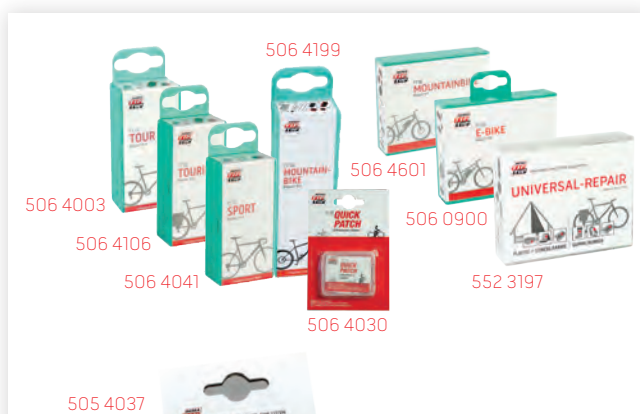

### VULCANIZING FLUID

Ref. No.	Description	Qty
505 4037	Vulcanizing fluid 5 g, with self-service clip	10
505 4051	Vulcanizing fluid 10 g, with self-service clip	10



### TUBE PATCH STRIPS

Ref. No.	Description	Qty
506 4113	Tube patch strip TT 02, bicycle, self-service clip	10



### TUBE REPAIR SHEET

Ref. No.	Description	Qty
500 4520	Tube repair sheet 10 x 10, self-service clip	10



### LEAKFINDER

Ref. No.	Description	Qty
552 4062	Leakfinder	10



### CO2 CARTRIDGES

Ref. No.	Description	Qty
596 4430	CO2 cartridges, self-service clip, 12 g, 2 pieces	10
596 4426	CO2 cartridges, self-service clip, 16 g, 2 pieces	10



### VALVES AND ACCESSORIES

Ref. No.	Description	Qty
562 6032	SCLAVERAND valve to DUNLOP/bicycle pump	10
562 6018	DUNLOP/bicycle valve to car pump	10
562 0636	Bicycle Patent valve assortment	10
562 0650	MTB valve assortment	10
562 0629	Bicycle valve assortment	10



➔ similar pictures



## TYRE AND TUBE REPAIR/REP & AIR

### REP & AIR TUBELESS

#### For motorcycles with tubeless tires

For sealing of punctures without demounting the tyre from the rim. Safety warning: The tyre should be checked/repared permanently after 400 km maximum (at a maximum speed of 60 km/h)

Ref. No.	Description	Qty
506 0351	REP & AIR Tubeless Threaded CO2 cartridges are filled with medical/technical carbon dioxide. <b>Scope of delivery:</b> 3 SUPER SEALASTIC repair plugs, 1 Tube of SPECIAL CEMENT BL 4 g, 1 Inserting tool, 1 Clasp knife, 1 Chalk, 3 Cartridges 16 g each, 1 Cartridge adapter, 1 Cartridge freeze protector, 1 Manual	5
506 4357	REP & AIR Tubeless, with self-service clip	5




### REP & AIR TUBE

#### For MTB/motorcycle tube tires

The complete breakdown service for on the way  
After the repair, the tyre is easily inflated.  
No air pump - no loss of time!

Ref. No.	Description	Qty
506 0375	REP & AIR Tube Threaded CO2 cartridges are filled with medical/technical carbon dioxide. <b>Scope of delivery:</b> 2 Tube patches size 0, 1 Tube patch size 7, 1 Tube of SVS vulcanizing fluid 3 g, 1 Emery paper, 1 Car valve core, short, 1 Slotted valve cap, 4 Cartridges 16 g each, 1 Cartridge adapter, 1 Cartridge freeze protector, 1 Instruction manual	5

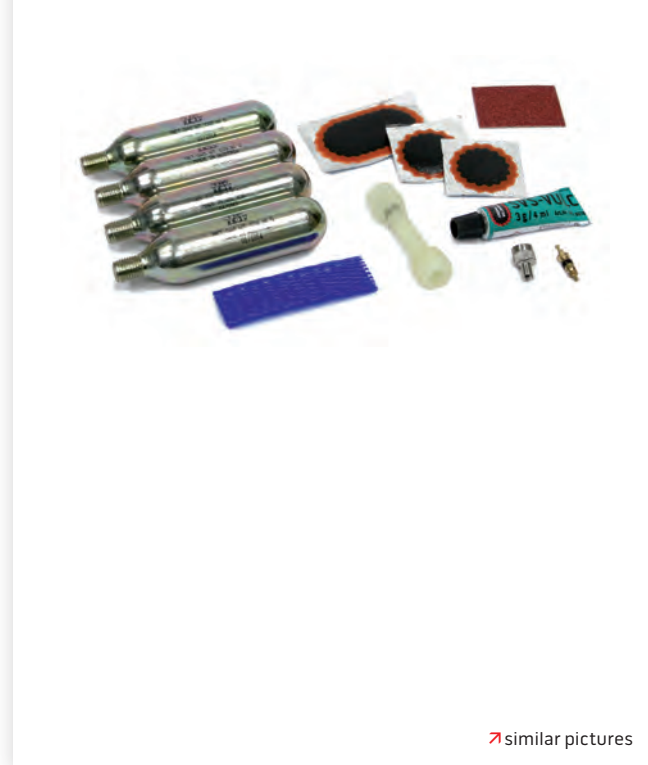

similar pictures

## TYRE AND TUBE REPAIR/TYRE SEALANTS

### PREVENTIVE TYRE SEALANT TT SEAL

- Preventive tyre sealant for Tube-type and Tubeless tyres
- Helps to avoid costs arising from the breakdown of expensive vehicles and machines
- Reduces the risk of tyre failures due to slow air loss, e.g. from smaller punctures
- Automatically seals smaller injuries
- Stays effective during the whole service life of a tyre
- Affects neither existing tyre repairs nor the reparability of a tyre
- Contains anti-corrosive agents for protection of rims and metal parts
- Free of CHC and aromatic compounds
- A detailed list of quantities required for each tyre sizes is enclosed
- **Caution: Approved for a maximum speed of 80 km/h!**

Ref. No.	Description	Content	Qty
593 1239	TT SEAL, in display box	250 ml Tube	12
593 1291	TT SEAL SB	250 ml Tube	5
593 2670	TT SEAL	1 l Bottle	10



### EMERGENCY TYRE SEALANT SPRAY

For the repair of smaller injuries on the running tread of all types of bicycle Tubes.

For all types of bicycle tyres with or without Tube. Cannot be used when the Tube or cover is torn open, or when the tyre has slipped.

Ref. No.	Description	Content	Qty
593 2230	Emergency tyre sealant spray. Suitable for DUNLOP valves or with suitable adapter	75 ml spray can	20
593 2240	Emergency tyre sealant spray with side hose adapter Suitable for SCHRADER valves or with suitable adapter	75 ml spray can	20




➤ similar pictures


## TYRE AND TUBE REPAIR/TYRE SEALANTS

### PROFESSIONAL LATEX SEALING MILK TT-SEAL TUBELESS & TUBE TYRES

- Preventive puncture protection suitable for MTB and road bike tyres, for tubeless systems, tyre-tube systems
- Tubeless sealing milk made of latex with excellent puncture-proof properties
- For sealing puncture wounds, and leaks between tyres & rim
- Required amount per tyre:  
MTB 75 ml - 100 ml, road bike 35 ml - 45 ml
- The TT-SEAL filler syringe (100 ml capacity) enables clean and quick filling directly through the valve (works with Schrader- & Sclaverand valves)

Ref. No.	Description	Content	Qty
593 1230	TT-SEAL Tubeless & Tube Tyres	150 ml Bottle	12
593 1231	TT-SEAL Tubeless & Tube Tyres	1 L Bottle	12
593 1232	TT-SEAL Injector	100 ml Injection	12

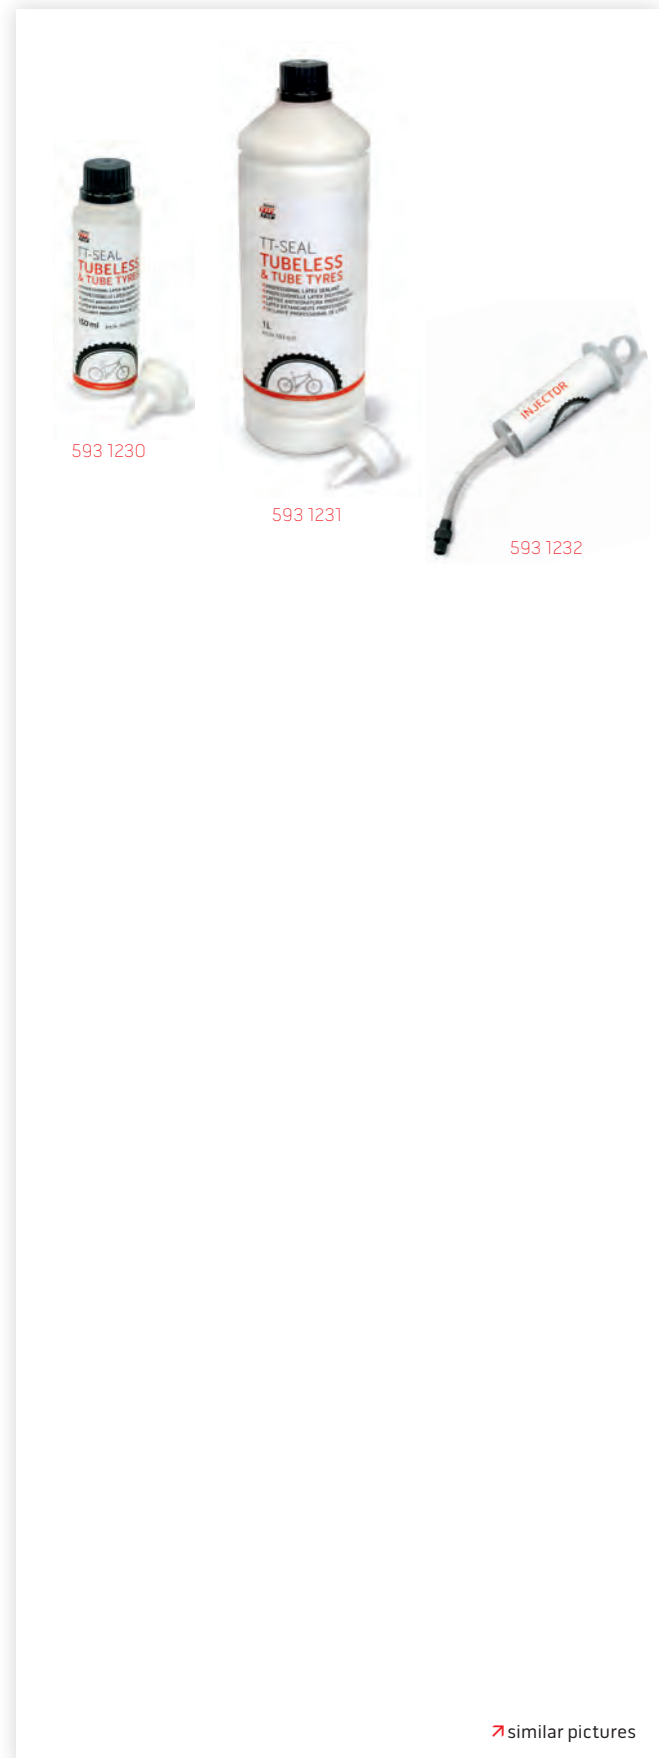

 similar pictures

## OUTDOOR REPAIR MATERIAL

### UNIVERSAL-REPAIR

- The extensive all-purpose repair kit for indoors, outdoors and travel
- Repair kit for rubber articles and CAMPLAST kit for plasticized PVC, artificial leather and fabric surfaces
- For pool covers and covering sheets, tents and ground sheets, airbeds, rainwear, inflatable rubber dinghies, umbrellas, sun blinds, bicycle Tubes, rubber boots, etc.

Ref. No.	Description	Qty
552 4196	Universal repair kit	10
552 3197	Universal repair kit, with self-service clip <b>Scope of delivery:</b> 3 Tube patches size 1, 3 Tube patches size 2, 1 Tube patch size 7, 1 Tube of vulcanizing fluid 5 g, 1 Working instructions for rubber items, 2 CAMPLAST patches approx. 35 mm Ø, 2 CAMPLAST patches approx. 45 mm Ø, 1 CAMPLAST patch approx. 73 x 38 mm, 1 Tube of CAMPLAST cement 6 g, 1 Emery paper with special rubberpad, 1 Emery paper, 1 Instruction manual	10

### CAMPLAST

- For the repair of small punctures on tents and other outdoor articles with PVC, PU or fabric surfaces
- Can also be used for sealing leaky seams of PU-coated tents
- Contain CAMPLAST repair patches and products for pasting of plasticized PVC and textile fabric, such as sun blinds
- Joints pasted with CAMPLAST cement are thermally stable up to about 60 °C depending on load
- Free of CFC and aromatic compounds
- Store cool and dry

Ref. No.	Description	Colour	Qty
552 3001	CAMPLAST 1 kit	transp.	24
552 4000	CAMPLAST 1 kit, SB	transp.	10
552 3063	CAMPLAST 1 kit, with self-service clip <b>Scope of delivery:</b> 2 Patches approx. 35 mm Ø, 1 Patch approx. 45 mm Ø, 1 Patch approx. 73 x 38 mm, 1 Tube of CAMPLAST cement 6 g, 1 Emery paper, 1 Instruction manual	transp.	20
552 3207	CAMPLAST 3 kit	transp.	10
552 4206	CAMPLAST 3 kit, with self-service clip <b>Scope of delivery:</b> 3 Patches approx. 35 mm Ø, 3 Patches approx. 45 mm Ø, 3 Patches approx. 73 x 38 mm, 1 Repair strip approx. 75 x 300 mm, 4 Tubes of CAMPLAST cement 6 g each, 1 Emery paper, 1 Instruction manual	transp.	10



→ similar pictures



## MOUNTING STANDS

### PNEUMATIC MOUNTING STAND

- Convenient working due to the pneumatic lifting device
- Also suitable for E-bikes with weight exceeding 35 kg
- Secured directly to the floor through four bolt holes or on a metal base plate which is available as an optional accessory
- Patented 3-point clamping system included (description on page 20)

#### Technical data:

Size (L x H x B):	760 x 1720 x 540 mm
Weight:	49 kg
Max. loading capacity:	35 kg
Stroke:	600 mm
Lifting height:	775 – 1375 mm (center of clamping system)
Operating pressure:	8 bar (max. 10 bar)

Ref. No.	Description
589 4994	Pneumatic mounting stand

#### All REMA TIP TOP mounting stands including 3-point clamping system

- Unique 3-point clamping system patented by REMA TIP TOP
- Bike can be turned by 160° using an angle adjusting system
- Allows frames of various shapes and materials to be clamped
- Delicate frames made of carbon or aluminium cannot be scratched, thanks to the rubber coated pins

On request, the additional arm with adjustable clamp (ref.no. 589 4997) can always be ordered instead of the 3-point clamping system

### PNEUMATIC MOUNTING STAND XL

- Convenient working due to the pneumatic lifting device
- Lifting and lowering movement via pneumatic cylinder Ø 80 x 800 mm Stroke and hand lever valve with adjustable silencer throttles
- Also suitable for E-bikes with weight exceeding 35 kg
- Secured directly to the floor through four bolt holes or on a metal base plate which is available as an optional accessory
- Patented 3-point clamping system included (description on page 20)

#### Technical data:

Size (L x H x B):	680 x 1750 x 760 mm
Weight:	75 kg
Max. loading capacity:	35 kg
Stroke:	800 mm
Operating pressure:	8 bar
Maximum pressure:	10 bar

Ref. No.	Description
589 5003	Montageständer pneumatisch XL



## MOUNTING STANDS

### GREEN & CLEVER MOUNTING STAND

- Mechanical bicycle mounting stand with energy-saving lifting assistance through an integrated gas pressure spring.
- No foot pedal or pneumatic support necessary.
- A special gas pressure spring compensates the normal weight of the bicycle.
- Simply attach the wheel in the clamping system and easily move up and down by hand slide.
- Fixing to working height with a cam lever.
- Extra high XL-lifting capacity of up to 800 mm!
- Base height of the swivel unit (center rolls) of 725mm.
- Very environmentally friendly, no energy costs, no special connections required!
- Secured directly to the floor through four bolt holes or on a metal base plate which is available as an optional accessory
- Patented 3-point clamping system included

#### Technische Daten:

Size (L x H x B):	580 x 1800 x 760 mm
Weight:	58 kg
Max. loading capacity:	30 kg
Stroke:	800 mm
Lifting height:	740 – 1540 mm (center of clamping system)

Ref. No.	Description
589 5832	GREEN & CLEVER mounting stand

### ALUMINIUM MOUNTING STAND

- Working height (max. approx. 170 cm) adjustable before clamping the bike
- Secured directly to the floor through four bolt holes or on a metal base plate which is available as an optional accessory
- Patented 3-point clamping system included  
(description on page 20)

#### Technical data:

Size (L x H x B):	660 x 1715 x 500 mm
Weight:	21 kg
Max. loading capacity:	35 kg

Ref. No.	Description
589 4737	Aluminium mounting stand



## CEILING LIFT

---

### CEILING LIFT BICYCLE


also works as a single product

- Especially designed for quick, accurate and easy lift bicycles
- Compact, robust design
- Easy installation
- Low noise level (75 dba.)
- Operation via two-button control panel
- 3 hanging hooks, PVC coated to avoid damage

#### Technical data:

Size (L x H x B):	1030 x 205 x 275 x 205 mm
Max. loading capacity:	150kg
Stroke to max.:	2750 mm
Voltage:	230 Volt AC

Ref. No.	Description
589 5826	Ceiling lift bicycle

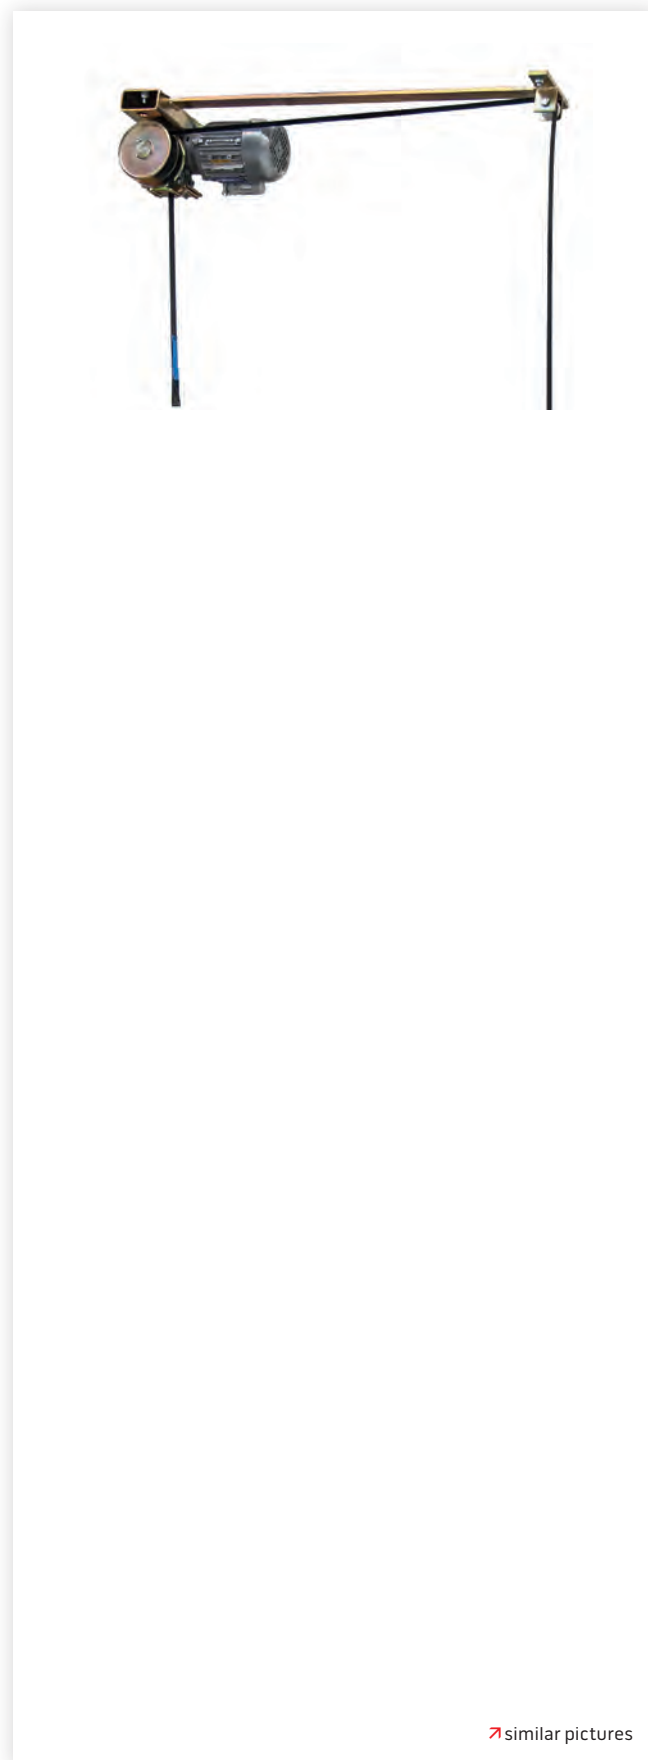

[similar pictures](#)

## MOUNTING STANDS ACCESSORIES

---

### 3-POINT-CLAMPING SYSTEM WITH WALL-MOUNTING DEVICE

- Unique 3-point clamping system patented by REMA TIP TOP
- Bike can be turned by 160° using an angle adjusting system
- Allows frames of various shapes and materials to be clamped
- Delicate frames made of carbon or aluminium cannot be scratched, thanks to the rubber coated pins

### 3-POINT CLAMPING SYSTEM, FOR MOUNTING STANDS WITH CLAMP

- Ideal for all traditional mounting stands with clamp
- With the integrated adapter you can easily convert your old mounting stand to the new 3-point clamping system
- Perfectly suitable for especially delicate frames made of carbon or aluminium
- Reliable securing of the bike without scratches thanks to optimal pressure distribution on three PVC universal pins

Ref. No.	Description
589 4726	3-point clamping system, for mounting stands with clamp

### 3-POINT-CLAMPING SYSTEM WITH WALL-MOUNTING DEVICE

- Space-saving wall-mounting for bicycle workshops
- Perfect for outside service stations or "Do-it-yourself corners"
- Also suitable for your own bicycle workshop at home, e.g. in the cellar or garage
- When not in use, the 3-point-clamping system can be easily dismantled from the wall plate by loosening just one screw

Ref. No.	Description
589 4725	3-point-clamping system with wall-mounting device



[similar pictures](#)



## MOUNTING STANDS ACCESSORIES

### BASE PLATE FOR MOUNTING STAND

Ensures stability if the mounting stand is not secured to the floor.

Ref. No.	Description	Qty
589 4738	Base plate for article: 589 4736, 589 4737, 589 4994, 589 5832, 589 5003 Technical Data: Dimensions: 750 x 500 x 25 mm Weight: ca. 45 kg	1

### BASE PLATE EXTENSION

- For secure standing when using the aluminium assembly stand (Ref. No. 589 4737) as a double workplace
- Extension for the base plate when using a rear-mounted workstation
- Metal plate, curved with 2 supports for attachment to the existing base plate

Ref. No.	Description	Qty
589 4996	Base plate extension, incl. screws Dimensions: 250 x 500 mm	1

### MOUNTING STAND EXTENSION

- suitable for Ref. No. 589 4736, 589 4737, 589 4994, 589 5832, 589 5003
- Platform insert for assembly stand Bike pneumatic
- Total working height of assembly stand is raised by 250 mm
- Consisting of two adapter plates, which are screwed together by means of five round rods made of aluminium. The connection to the assembly stand and platform is made using the existing screws of the assembly stand
- Material: Steel plates powder-coated red RAL3020, round bars aluminium


Ref. No.	Description	Qty
589 5833	Mounting Stand Extension	1

### EDGE PROTECTION

- Edge protection for 3-point clamping system
- For all REMA TIP TOP mounting stands with 3-point clamping system
- Protects the bike frame from potential damage by metal parts of the clamping system.
- Simply clip on

Ref. No.	Description	Qty
589 5052	Edge protection for 3-point clamping system	1



 similar pictures

## MOUNTING STANDS ACCESSORIES

### CLAMPING EXTENSION

- Can be mounted in place of a PVC roller or the Universal retaining pin
- Effects a enlargement of the 3-point clamping system
- Makes it easier to clamp "difficult" bicycle frames

Ref. No.	Description	Qty
589 5831	Clamping extension Length: 140 mm	1

### UNIVERSAL RETAINING PIN

- Rubberised quick change pins
- Ideal for frame shapes which cannot be clamped with the PVC rollers because space is an issue

Ref. No.	Description	Qty
589 5823	Universal retaining pin, rubberised Length: 1 x 160 mm	1

### BOTTOM BRACKET PIN FOR TENSION ROD

- The PVC guide roller of the aluminium tension rod can be converted with this set
- On many modern bicycle frames, the rubberised bottom bracket pin is better for clamping

Ref. No.	Description	Qty
589 5849	Bottom bracket mandrel for aluminium tension rod <b>Scope of delivery:</b> - 1 piece holding pin 72 mm, rubberised - 1 piece slot nut M8 - Assembly instructions	1

### ADDITIONAL ARM

For conversion the Mounting Stand Aluminium to a twin work station


Ref. No.	Description	Qty
589 4995	Additional arm	1

### ADDITIONAL ARM WITH ADJUSTABLE CLAMP

Additional arm with adjustable clamp

Suitable for Ref. No. 589 4736, 589 4737, 589 4994

Ref. No.	Description	Qty
589 4997	Additional arm	1
589 4998	Guide plate, for additional arm with adjustable clamp	1
589 5000	Replacement rubber jaws, set of 4	1

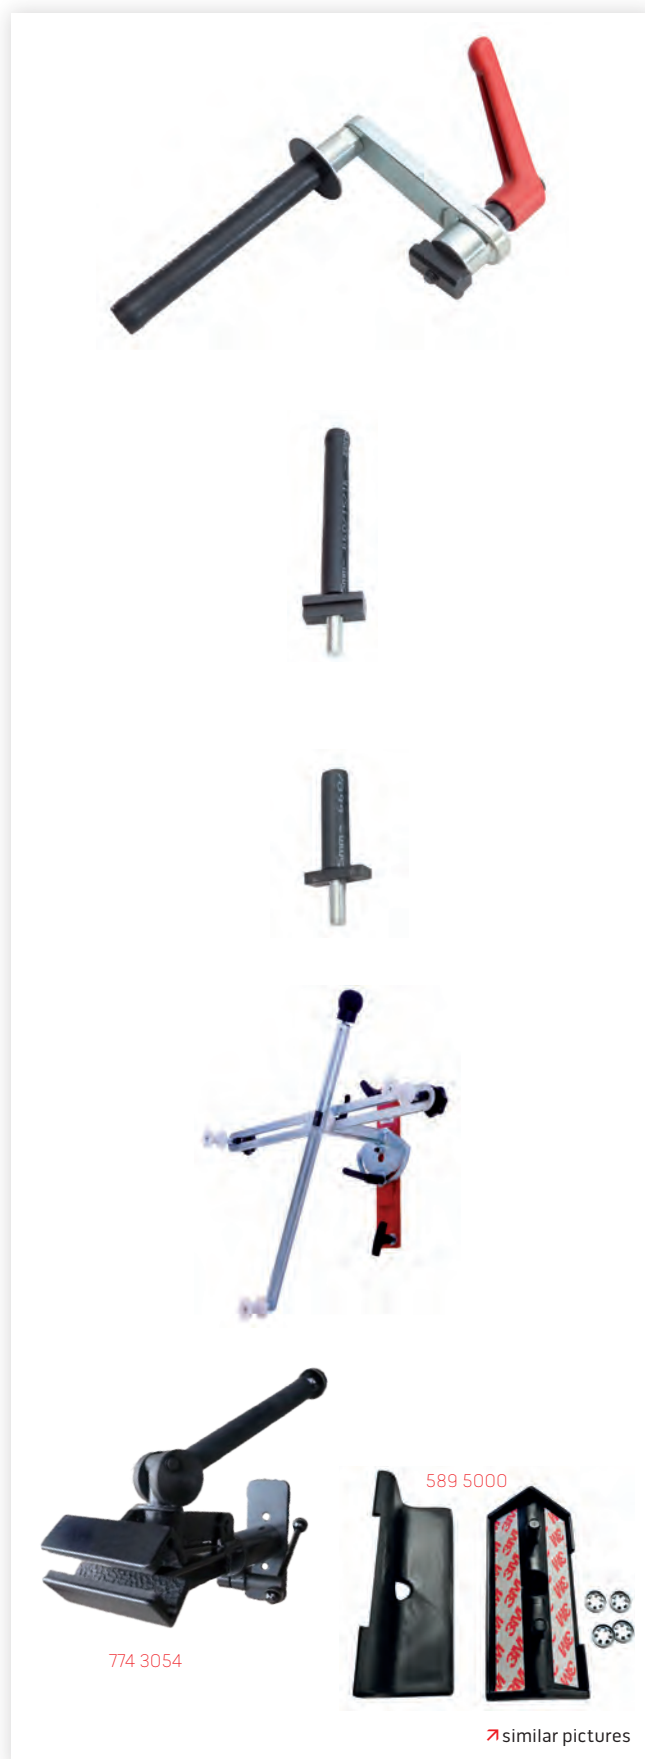

[similar pictures](#)



## REMA TIP TOP BATTERY LOCKER S/M/L

Storage and charging cabinet

The high-security zone for lithium-ion batteries


Optimum storage conditions and reliable fire protection for LI-Ion batteries: The new REMA TIP TOP BATTERY LOCKER offers the perfect solution for every bicycle workshop!

## REMA TIP TOP BATTERY LOCKER

---



Recirculation fan  
Weight: 18 kg



Extractor fan  
Weight: 10 kg



BATTERY LOCKER S  
Weight: 210 kg



BATTERY LOCKER M  
Weight: 340 kg

### Lithium-ion batteries: High performance, high demands

Lithium-ion batteries make e-bikes mobile and are indispensable in the bicycle repair shop. Improper storage, however, carries a significant potential risk: After a technical defect or mechanical impact, they can ignite themselves. It creates an explosive jet flame and gases can spread quickly. If several batteries are stored in one place, this leads to a significant chain reaction.

Even a complete discharge of the battery can cause unnoticed damage, so the charging power should be constant at 40%. For this purpose, a specific ambient temperature must be maintained. Therefore storage conditions require the highest level of safety, optimum climate and reliable fire protection.

### REMA TIP TOP BATTERY LOCKER: Fire protection and perfect conditions

The REMA TIP TOP BATTERY LOCKER is a safety cabinet specifically designed for the storage of Lithium-ion batteries. It is made in Germany and consists of a non-flammable material. Due to its high-quality design and processing, it offers 90 minutes of complete fire resistance.

The doors close in case of fire independently and offer otherwise secure theft protection. To minimize the risk of fire in advance, the BATTERY LOCKER is grounded, so that ignition by electrostatic charging are excluded.

With the right accessories for the REMA TIP TOP-BATTERY LOCKER, the storage conditions for the Lithium-ion batteries can be further improved. At the exhaust air opening on the top of the cabinet can be a recirculation fan or exhaust fan connected. The BATTERY LOCKER is available in three sizes S, M and L. Depending on the storage requirements and space, every bicycle workshop will find the right model.



# REMA TIP TOP BATTERY LOCKER



**BATTERY LOCKER L**  
Weight: 600 kg

## REMA TIP TOP BATTERY LOCKER

- Made in Germany
- GS/CE label
- Resistant to fire for 90 minutes
- Made of non-flammable material (A2), surface-coated
- High-chemical-resistance surface
- Body grey, similar to RAL 7035 light grey microperl, edges in different shade
- Door stay hinge, self-closing in case of fire
- Stainless steel hinges, metal handle
- Removable plinth board for pallet truck access
- Adjustable feet for easy positioning and levelling, adjustable plinth
- Earthed to avoid electrostatic charging and possible discharge sparking
- Inlet and exhaust ventilation on top of cabinet (Exhaust pipe NW 100)
- Automatically-triggered closing of air in- and outlet through thermal monitoring
- Available in three sizes

**Attention: Shipping and delivery must be clarified before the order - REMA TIP TOP supports you!**

The REMA TIP TOP BATTERY LOCKER program is modular.

You can combine cabinets and accessories according to your needs:

## REMA TIP TOP BATTERY LOCKER – Product range

Ref. No.	Description
589 5841	BATTERY LOCKER S Security Cabinet Under-table safety cabinet Size: 1.100 x 500 x 670 mm (W x D x H) Weight: 210 kg
589 5842	BATTERY LOCKER M Security Cabinet Size: 600 x 595 x 1.960 mm (W x D x H) Weight: 340 kg
589 5843	BATTERY LOCKER L Security Cabinet Size: 1.200 x 595 x 1.960 mm (W x D x H) Weight: 600 kg
589 5844	Extractor fan Weight: 10 kg
589 5845	Recirculation fan with activated carbon filter Weight: 18 kg
589 5846	Cable entry, fire resistant





## REMA TIP TOP BATTERY CHARGING CABINET

---



Battery charging cabinet from inside



When charging lithium batteries, fire protection is given a high priority. REMA TIP TOP now offers a safe solution for this. Equipped with important safety features, the fire consequences of these energy storage units can be reduced to a minimum and safety during operation can be significantly increased.

- Charging multiple lithium batteries in the cabinet
- Early alert in the event of damage
- All relevant safety rules for charging lithium batteries are observed
- Ideal for shielding batteries from the stored stock for the charging process

### Properties

- MPA-tested fire resistance over 60 min from inside to outside in accordance with DIN EN 1363-1
- Real battery fire test conducted with an independent university
- Construction with non-combustible, fire-resistant components
- Special fire protection seals prevent flames from escaping

- Cold smoke-tight closure system of the openings
- Transportable for positioning at the installation site
- Double-leaf, lockable doors with stable locking & suspension
- Door finish in orange, similar to RAL 2004; Body in grey, similar to RAL 7035

### For all charging variants

- Heat dissipation during charging by fan
- Power supply through 4-fold socket strip (3500 W, 16A)
- Interruption of the charging current when opening the doors
- Charge stop in case of malfunction or average
- Closure of the supply and exhaust air openings by means of thermocouples

### Optional

Fireproof, tested cable feed-through for high flexibility (e.g. for cabling of the in-house fire alarm system)

## REMA TIP TOP BATTERY CHARGING CABINET

- Over 84 possible combinations
- For internal changeover or rapid evacuation
- For full application diversity with small space requirement



### Product advantages

- ✓ Entry-level models
- ✓ Stackable up to 3-high
- ✓ At the same time also accessible from underneath
- ✓ Mobile, compact, evacuable
- ✓ Risk is divided into smaller fire sections
- ✓ Controllable damage event (fire, explosions, smoke)
- ✓ MPA-tested safety and real battery fire test

### Application advantages

- ✓ Safe, separate loading and storage
- ✓ Modularly expandable  
→ Demand-based, high diversity of application
- ✓ Flexible capacity increase after Initial acquisition
- ✓ Separation of different batteries
- ✓ Decentralised installation, safety at work
- ✓ Ideal solution for every risk assessment
- ✓ The idea of protection also in the sense of the fire brigade

### REMA TIP TOP BATTERY CHARGING CABINET – Article

Ref. No.	Model	Description	External dimensions (bxdxh cm)	Internal dimensions (bxdxh cm)	Weight ca. kg
589 5704	Storage	Smoke detector (without power connection, without ventilation)	80 x 62 x 52	73 x 53 x 45	105
589 5705	Charging Basic	Smoke detector, power supply in the cabinet, technical ventilation, power cut-off in case of heat development, door contact switch	80 x 62 x 52	73 x 53 x 45	106
589 5706	Charging Premium	In addition to Charging Basic: with alarm, power-off switching also in case of smoke formation, smoke detector with potential-free output for alarm signal	80 x 62 x 52	73 x 53 x 45	106
589 5707	Charging Premium Plus	In addition to Charging Premium: with remote alarm & Data transmission via SIM card, further functions via remote access	89 x 62 x 52	73 x 53 x 45	106
589 5720	Stacking foot set	Set with 4 metal feet, cabinets can be stacked up to 3 high, for easy access underneath the cabinets (e.g. with a lift truck), plus 10 cm in height per cabinet, for retrofitting, complete with screws, incl. metal plate to prevent slipping sideways.	-	-	-

## COMPRESSOR

### PAINTAIR 300/4

This piston compressor of SILENT series finds there its use where low noise is required. Thanks to excellent sound (noise of only 40 dB (A)), the compressor can be used directly at the workplace.

- Super quiet thanks to special sound insulation
- Easy transportation
- High filling capacity

Ref. No.	Description	Qty
589 5009	piston compressor PAINTAIR 300/4	1



#### Technical specifications:


Silenced, special for decoration and Air-Brush

I	V/Ph	kW	HP	Model	l/min.	m <sup>3</sup> /h	c.f.m.	bar	p.s.i.	R.P.M.	n°	n°	dB (A)	LwA	L x D x H (cm)	kg	lbs
4	230/1	0,19	0,26	-	25	1,25	0,88	8	116	2850	1	1	40	-	20 x 45 x 46	20	44

### SPECIAL OIL FOR COMPRESSORS 500 ML

- Sincom / 32E - High-quality synthetic oil for Fini compressors
- The oil complies with DIN standard 51352- 2POT and DIN standard 51354 FZG stadio 12.
- Only use the original Sincom / 32E compressor oil.

Ref. No.	Description	Content	Qty
589 5007	Special oil for compressors	500 ml	1

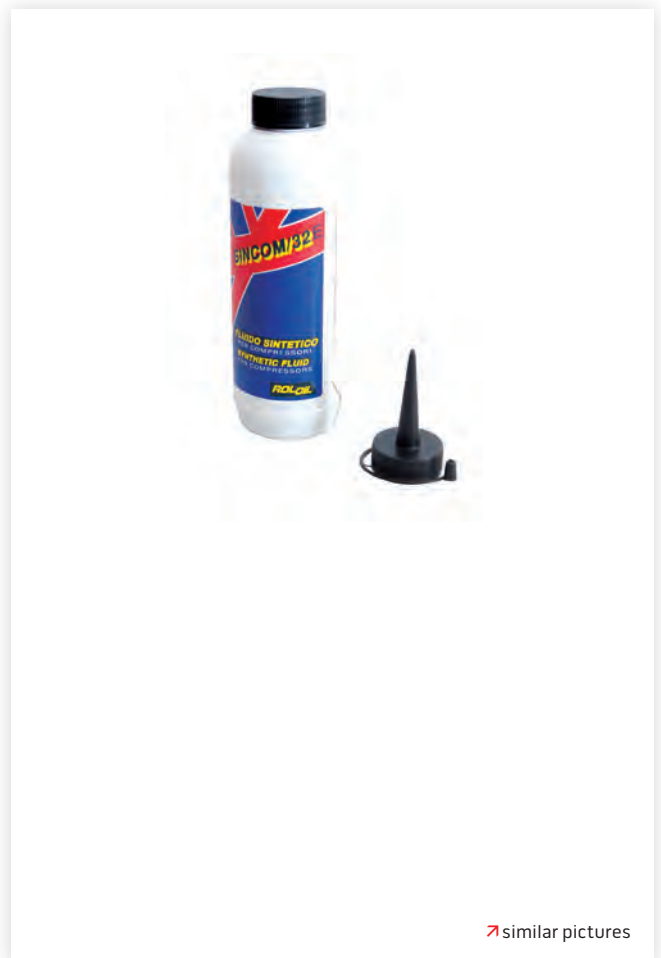

[similar pictures](#)

## COMPRESSED AIR ACCESSORIES

### THREADED FITTINGS – 90° ELBOWS, T-PIECES

Ref. No.	Description	Thread	Qty
774 2512	T-piece, male thread	G 3/8" AG	1
774 2567	90° Elbow, male thread	G 3/8" AG	1




### RAPID-ACTION COUPLING – DISTRIBUTORS

Ref. No.	Description	Thread	Qty
774 3401	Two way distributors with female thread	G 3/8" IG	1
774 3418	Three way distributors with female thread	G 3/8" IG	1
774 6037	Distributor 3-way with female thread	G 3/8" IG	1



### THREADED CONNECTIONS

Ref. No.	Description	Thread	Qty
774 2206	Hose tail with male thread	G 3/8", LW 6	1
774 2316	Double nipple with male thread	G 3/8" x 3/8"	1
774 2323	Double nipple with male thread	G 1/2" x 1/2"	1
774 2354	Double nipple with male thread	G 1/8" x 1/4"	1
774 2361	Double nipple with male thread	G 1/4" x 3/8"	1
774 2378	Double nipple with male thread	G 3/8" x 1/2"	1
774 6006	Reduction with male/female thread	G 1/4" x 1/8"	1
774 2402	Reduction with male/female thread	G 3/8" x 1/4"	1
774 2419	Reduction with male/female thread	G 1/2" x 3/8"	1
774 2426	Reduction with male/female thread	G 3/4" x 1/2"	1
774 2433	Reduction with male/female thread	G 1" x 3/4"	1

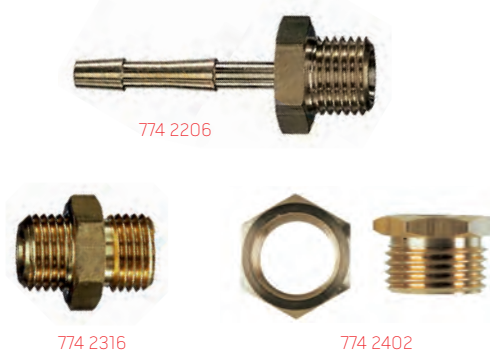

### SEALING TAPE

Ref. No.	Description	Length
292 1400	Thread	12 m



similar pictures

## COMPRESSED AIR ACCESSORIES

### COMPRESSED AIR HOSE PVC, PER METER

- Reinforced with synthetic fiber, resistant to aging, wear-resistant
- Conditionally acid-, petrol-, oil-resistant
- Pressures quoted for each 20°C
- At higher temperatures, the operating pressure is reduced

Ref. No.	Description	Operating pressure	mm
290 4403	PVC compressed air hose	15	6 x 3,0
290 4410	PVC compressed air hose	14	9 x 3,0

### COMPRESSOR HOSE, OIL RESISTANT

Ref. No.	Description	Dimension (mm)
290 4276	4276 Compressor hose	6 x 4
290 4283	4276 Compressor hose	9 x 4,5

### STANDARD COUPLINGS AND PLUGS

- Max. operating pressure: 16 bar
- Temperature range: -10 °C up to +90 °C

Ref. No.	Description	Thread	ø mm
774 3009	Rapid-action coupling, male thread G	1/4"	
774 3016	Rapid-action coupling, male thread G	3/8"	
774 3054	Rapid-action coupling, female thread G	1/4"	
774 3061	Rapid-action coupling, female thread G	3/8"	
774 3102	Rapid-action coupling, with hose connection		6
774 3119	Rapid-action coupling, with hose connection		9
774 3205	Plug, with hose connection		6
774 3212	Plug, with hose connection		9
774 3243	Plug, with male thread	1/4"	
774 3250	Plug, with male thread	3/8"	
774 3274	Plug, with female thread	1/4"	
774 3281	Plug, with female thread	3/8"	

### COILED AIRLINE HOSE WITH SAFETY COUPLING

- Made of polyurethane (PUR) with straight outlets on both sides
- High resistance to abrasion, wear and pressure
- Tailpiece and safety coupling rotate, DN 7.2
- Completely fitted, with antikink protection

Ref. No.	Description	Colour	NW	ø
869 4614	Coiled airline hose	yellow	6,5	1/4"
869 4490	Coiled airline hose	red	6,5	1/4"



→ similar pictures



## TYRE INFLATORS & TYRE PRESSURE GAUGES

### BLOW GUNS

Ref. No.	Description	Max. operating pressure
774 4709	<b>Blow gun polyamide</b> with extension nozzle <ul style="list-style-type: none"> <li>Made of blue crystal ball consolidated polyamide (for a longer life-time)</li> <li>Debit is dosable by lever operation</li> <li>Max. operating pressure: 10 bar</li> <li>Recommended operat. pressure 2-6 bar</li> </ul>	10 bar
831 3809	Blow gun polyamide with extension nozzle	
774 4819	<b>Blow gun aluminum</b> with coupling nipple <ul style="list-style-type: none"> <li>Flow through lever operation is intuitive controlable</li> <li>With normal nozzle (metal type, aluminum) <math>\varnothing</math> 1,5 mm</li> <li>Max. operating pressure: 10 bar</li> <li>Recommended operat. pressure 4-6 bar</li> </ul>	10 bar



### BICYCLE TYRE INFLATORS

Solid design with pressure gauge up to 10 bar (not verifiable). Equipped with SKS/DUO-valve port. Reliable for all valves.


Ref. No.	Description	Qty
508 8617	Universal bicycle tyre inflator gauge	1
508 8640	Pressure gauge	1



### BICYCLE TYRE INFLATOR

Bicycle tyre inflator for easy, rapid inflation of bicycle and MTB tires without additional adapters. With pressure gauge up to 10 bar / 145 psi (uncalibrated).

Ref. No.	Description	Qty
508 8601	Bicycle tyre inflator gauge	1
508 8632	Pressure gauge	1
774 4943	Connection nipple for Dunlop valve	1
562 5459	Sealing membrane	1
562 5105	Clip-on connector	1

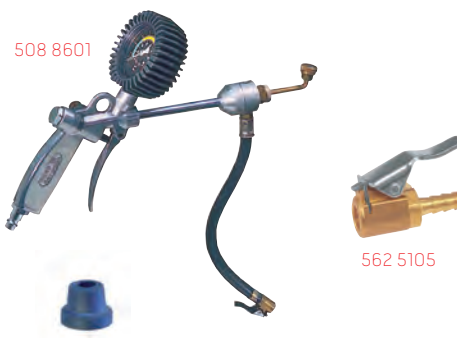

### CLIP-ON CONNECTORS

Ref. No.	Description	Qty
562 5215	Clip-on connector, Tube size 4.5 x 10 mm, Suitable for VG8	1
562 5222	Clip-on connector, Tube size 6.0 x 14 mm, Suitable for VG8	1




similar pictures

## BICYCLE VALVES

### BICYCLE VALVES, DUNLOP

Ref. No.	Description	Content	Qty
562 0605	ALLIGATOR express valve	2	25
562 0612	ALLIGATOR express valve, unpacked	1	1
562 0629	Bicycle valve assortment, with self-service clip DUNLOP/ bicycle valve adapter	1	40
562 0715	Valve cap, plastic DUNLOP/ bicycle valve adapter	1	100
562 0739	Top nut DUNLOP/bicycle valve	1	100
562 0746	Rim nut DUNLOP/bicycle valve	1	100
596 0327	Valve tubing DUNLOP/ bicycle valve	2,5 m	2

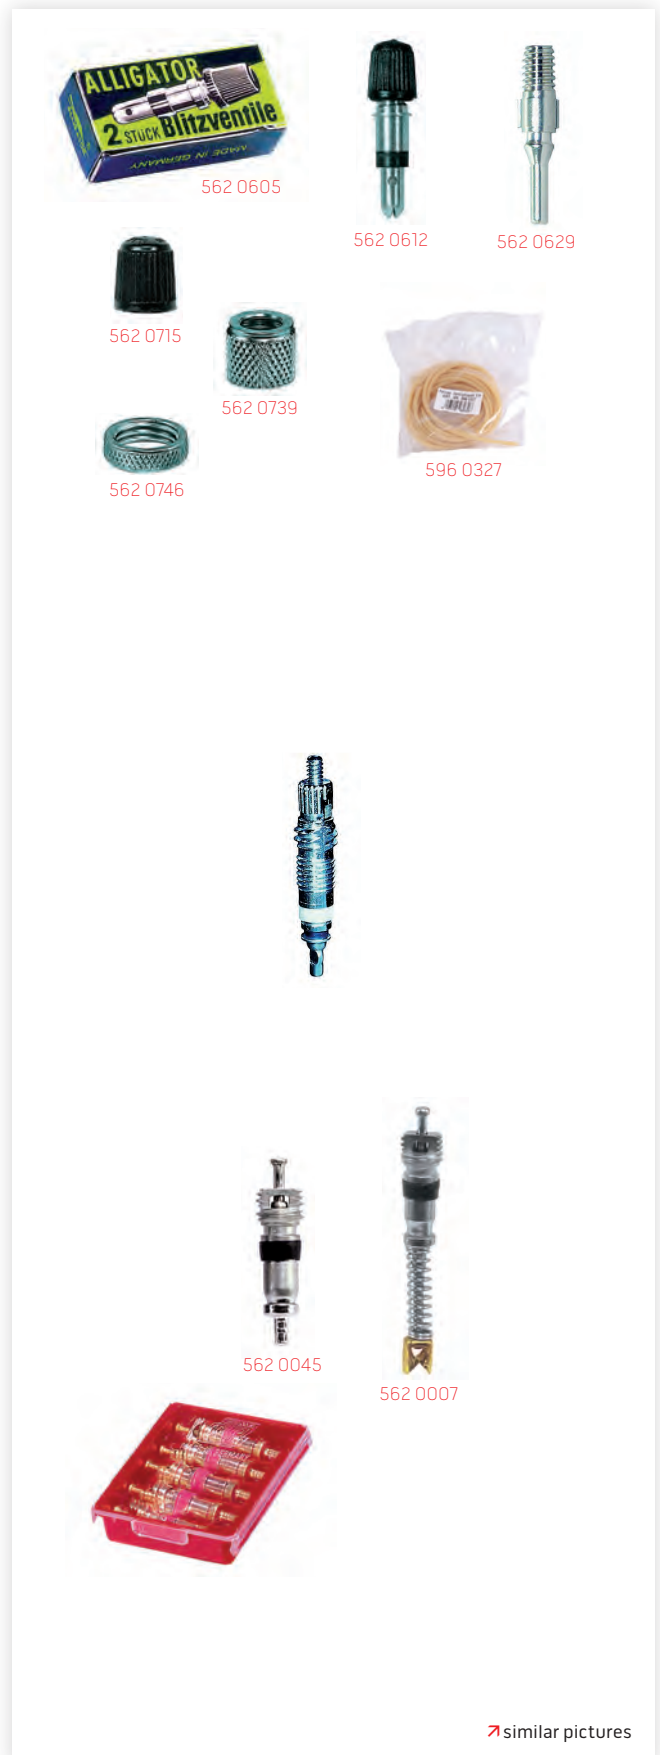

### BICYCLE VALVES, SCLAVERAND

Ref. No.	Description	Content	Qty
562 0021	Valve core, Sclaverand	1	100
562 0409	Valve cap, plastic	1	100
562 0416	Valve cap, metal	1	100
562 0760	Rim nut, Sclaverand	1	100

### VENTILEINSÄTZE, SCHRADER

Ref. No.	Description	TR-No.	Content	Qty
562 0007	Valve core, long	C1	100	1
562 0014	Valve core set, long	C1	5 in plastic box	4
562 0045	Valve core, short	C1	100	1
562 0052	Valve core set, short	C1	5 in plastic box	4

## BICYCLE VALVE ADAPTERS

### VALVE CAPS, METAL, VG8

Ref. No.	Description	TR-No.	Content	Qty
562 0155	Valve cap, extra short	VC3eq	100	1
562 0203	Valve cap	VC3eq	100	1
562 0100	Valve cap, with valve extractor	VC 2	100	1



562 0155



562 0203



562 0100

### FAHRRADVENTIL-ADAPTER

Ref. No.	Description	Content	Qty
562 5064	Valve adapter SCLAVERAND/ racing bike valve to DUNLOP/bicycle pump	1	10
562 5002	Valve adapter, with gasket DUNLOP/ bicycle valve to car pump	1	10
562 5019	Valve adapter, without gasket DUNLOP/ bicycle valve to car pump	1	10
562 6018	Valve adapter, with self- service clip DUNLOP/ bicycle valve to car pump	2	40
562 5026	Valve adapter Plug-in adapter for car valve to DUNLOP/bicycle pump	1	10
562 5459	Sealing membrane Connector	1	1



593 2120



593 2120



593 2120




593 2120



593 2120



593 2120

 similar pictures

# WORKPLACE MATS

Ergonomic floor solutions for industry, commerce and trade

## ERGOLASTEC® industrial workplace mats

### The forest floor effect


Impact-absorbing, slip-resistant, insulating - health and safety in the workplace with ERGOLASTEC® RUBBER MATS.

#### Easy installation of ERGOLASTEC® work mats



The prerequisite is a paved substrate, such as concrete/screed, synthetic resin floor, asphalt, tiles etc.

- Individual mats can be laid loosely without fixation
- Flexible in combination, simple horizontal mat connection due to the jigsaw system
- Suitable for all surface geometries; can be cut to size yourself with simple tools as required
- Different product variants can be combined as desired
- The mat size corresponds to the workplace dimensions in the production area according to DIN 33406.

Ref. No.	Type	Description
589 5041	Type A	Uncut
589 5042	Type B	Puzzle interlocking edge on one long side
589 5043	Type C	Puzzle interlocking edge on two long sides
589 5044	Type D	Puzzle interlocking edge on one short side
589 5045	Type E	Puzzle interlocking edge on two short sides
589 5046	Type F	Puzzle interlocking edge on one short side and one long side
589 5047	Type G	Puzzle interlocking edge on one short side and one long side, mirrored
589 5048	Type H	Puzzle interlocking edge on one short side and two long sides
589 5049	Type I	Puzzle interlocking edge on two short sides and one long side
589 5050	Type J	Puzzle interlocking edge on four sides

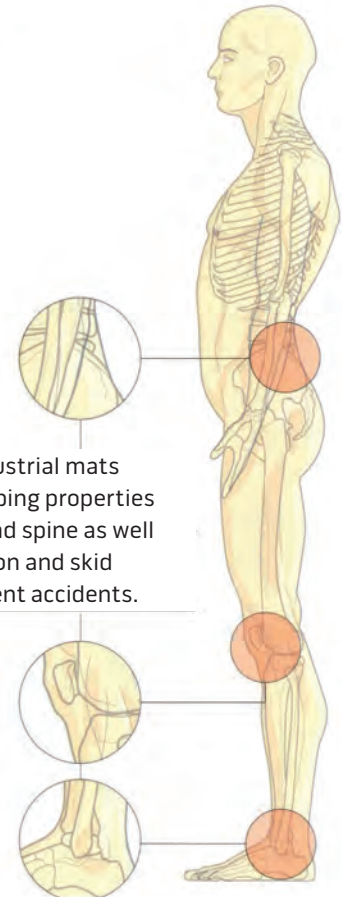

ERGOLASTEC® industrial mats boast shock-absorbing properties to protect joints and spine as well as improved traction and skid resistance to prevent accidents.

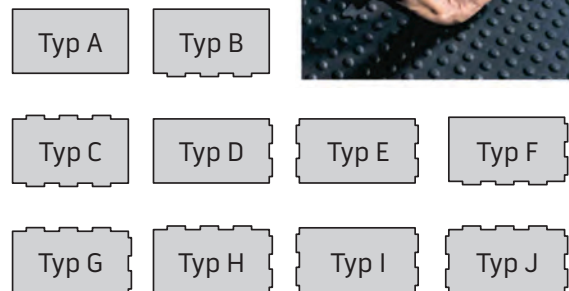

## WORKPLACE MATS

### ERGOLASTEC BASIC

#### THE MULTI-PURPOSE MAT FOR ALL HIGH-FOOTFALL AREAS AND STAND-UP WORKSTATIONS




- The multi-purpose mat for all high-footfall areas and stand-up workstations which are not exposed to any specific impact or hostile influences.
- ERGOLASTEC® basic is especially suitable for e.g. in front of workbenches, assembly benches, production lines, turning and milling machines, machining centres, in assembly pits, on gratings or at bar counters and cashier points.
- Bevelled outside edges for reduced risk of stumbling
- Protection for falling objects
- Very firm and sturdy and therefore suitable as a base when using transportation equipment
- Due to the high-quality material selection, the mat is relatively odourless and can therefore also be used in closed rooms.
- Easy cleaning of the mat with standard cleaning agents

#### Technical data:

Top side:	flat structure
Underside:	damping hemispheres
Outer edges:	20° bevelled
Length/width/thickness:	1350 x 1000 x 16 mm*
Weight:	19 +/- 1 kg
Hardness:	55 +/- 4 Shore A
Temperature resistance:	- 35°C to + 95°C
Material:	New rubber compound on the basis of SBR
Colour:	black, dust grey
Tensile strength:	> 4.0 MPa
Elongation:	> 300 %
Electr. Conductive behaviour:	not electrically insulating

\*Tolerances according to DIN ISO 3302-1M4

Ergolastec basic\_dry

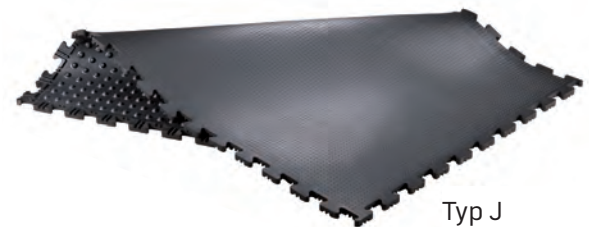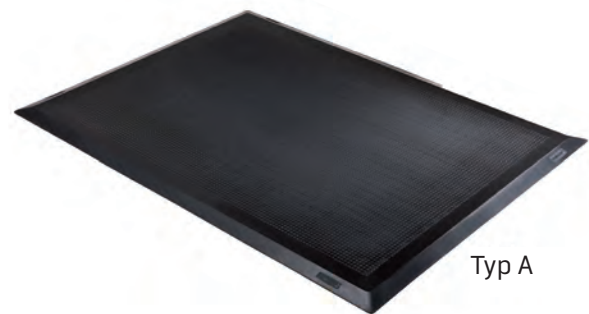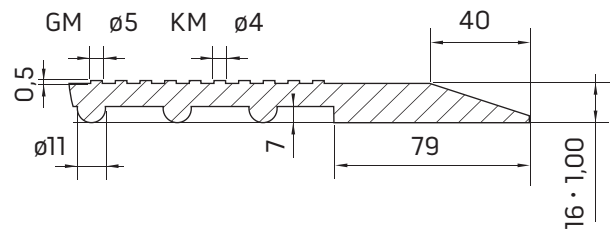

➤ Mat with flat textured surface for dry workstations



## SKIN PROTECTION PLAN

valuable for your employees

### PROTECTION SKIN PROTECT



Protects your hands at work.

- Protects against heavy soiling
- Protects the skin with an elastic, non-slippery film
- For works like tire repair or paint finishes



Ref. No. 593 2276  
SKIN PROTECT 1I –  
Protection creme  
before starting work



Ref. No. 593 2490  
Wall-mounted  
dispenser for 1 l & 2 l

### CLEANING HAND CLEANER



Cleans your hands.

- Dermatologically tested
- Cleans with very fine abrasive materials and mild ingredients
- Slightly perfumed paste
- High hygiene standard



Ref. No. 593 2150  
Hand Cleaner FLUID  
Tube 250 ml



Ref. No. 593 2120  
Hand Cleaner FLUID  
flexible bottle 2 l



Ref. No. 593 2490  
Wall-mounted  
dispenser for 1 l & 2 l



Ref. No. 593 2110  
Hand Cleaner FLUID  
standing botte 2 l



Ref. No. 593 2570  
Pump dispenser

### CARE SILK SKIN



Take care of your hands after work.

- Slightly greasy protective skin-care cream
- Contains natural oils and beeswax
- Helps regeneration of the skin



Ref. No. 593 2269  
SILK SKIN 1I –  
Skin care after washing



Ref. No. 593 2490  
Wall-mounted  
dispenser for 1 l & 2 l

## PROTECTING, CLEANING AND CARING

### HANDSCHUTZ

- SKIN PROTECT is a water-soluble, white, non-greasy and silicone-free skin cream which protects the skin with an elastic, non-slippery film
- Skin protection products help prevent damage to the skin by creating a "protective barrier"
- Protects against heavy soiling from substances such as soot, tar, adhesives, solvents, paint thinners etc.
- The slightly perfumed skin cream facilitates skin cleaning after work

Ref. No.	Description	Content	Qty
593 2276	SKIN PROTECT flexible bottle	1 l	1

### HAND CLEANER FLUID

- Hygienic packed hand cleaner, pumpable
- Gentle and powerful
- Ready for use
- For all washrooms of workshops

Ref. No.	Description	Content	Qty
593 2110	HAND CLEANER FLUID standing botte	2 l	1
593 2120	HAND CLEANER FLUID flexible bottle	2 l	1
593 2570	Pump dispenser		1

### HAND CARE

- SILK SKIN is a non water-soluble, silicone-free, slightly greasy protective skin-care cream with beeswax
- High-quality vegetable oils complemented with moisture-regulating ingredients keep the skin smooth and elastic
- Regular application after washing hands supports the natural resistance and regeneration of the skin
- Optional wall-mount dispenser available

Ref. No.	Description	Content	Qty
593 2269	SILK SKIN 1000 ml flexible bottle	1 l	1



similar pictures

## PROTECTING, CLEANING AND CARING

### UNIVERSAL WALL-MOUNTED DISPENSER

- Sturdy wall-mounted dispenser
- All Hand Cleaner dispensers are easy to re-fill
- Dispensing quantity is adjustable

Ref. No.	Description	Content	Qty
593 2490	Soft bottle dispenser for SKIN PROTECTION & HC-FLUID soft bag	1 l & 2 l	1



### CLEAN-UP HANDCLEANING WITHOUT WATER

- REMA TIP TOP CLEAN-UP is the cleaning paste to go
- Quickly removes even tough soiling from the hands without water – and is mild and gentle to the skin
- Simply put on your hands and dry-rub off

Ref. No.	Description	Content	Qty
593 2252	TT-Clean up, SB, 25-ml-stand tube	25 ml	1
593 2255	TT-CLEAN UP, COUNTER DISPLAY 20 x 25-ML-TUBEN	25 ml	1



### HAND CLEANER TOP CLEAN

- Efficient, cream formula hand cleaner which does not attack the skin
- Removes toughest soiling such as oil, grease, resin, paint etc.
- Cleans with mild ingredients and very fine abrasive materials with no organic solvents
- Contains no sand and therefore does not clog outlets or drains
- Over 90% of the ingredients are biodegradable
- Microplastic free

Ref. No.	Description	Content	Qty
593 2001	Hand Cleaner TOP CLEAN	250 ml Tube	1
593 2057	Hand Cleaner TOP CLEAN	1 l Bucket	1
593 2019	Hand Cleaner TOP CLEAN	5 l Bucket	8
593 2026	Hand Cleaner TOP CLEAN	10 l Bucket	1
593 2063	Pump dispenser TOP CLEAN	–	1
593 0412	Hand Cleaner dispenser STANDARD, universal	–	1



**0% MICRO-PLASTIC**



593 2001



593 0412



➤ similar pictures

---

## Editor

### TIP TOP Automotive GmbH

Walter-Rathenau-Ring 47

59581 Warstein-Belecke/Germany

Phone +49 (0) 2902/97 73 2-0

Fax + 49 (0) 2902/97 93 2-50

bestellung@tiptop-automotive.eu

[www.tiptop-automotive.eu](http://www.tiptop-automotive.eu)

Webshop: [www.tiptop-webshop.eu](http://www.tiptop-webshop.eu)

## Legal provisions

Copyright © 2022 TIP TOP Automotive GmbH

The content of this publication has been compiled to the best of our knowledge. The pictures shown do not correspond to the scope of delivery and may contain optional accessories. All information is non-binding.

A claim for damages of any kind is excluded. We reserve the right to make product modifications, insofar as they serve technical progress and do not significantly modify the product. The indications on the use of the products listed by way of example are based on application technical experience, but do not constitute a guarantee for their suitability in specific areas of application and do not exempt the user from carrying out his own checks, also with respect to any third-party property rights.

Operating and working instructions, product information and general notes on the vulcanised properties of natural and synthetic rubber must be observed. The stated mechanical and physical values of our products refer only to the material mentioned (without compound layer and without tension member inserts), are based on accompanying release tests and represent statistical product figures, but do not constitute guaranteed properties.

To maintain the product properties, the recommended storage conditions according to DIN 7716 must be observed. (e.g. dry, cool, dark, original packaging).

**Sales of 2-wheel products (Germany)**

Uwe Dohse  
Mobile: +49 171 148 66 30  
E-mail: [uwe.dohse@tiptop-automotive.eu](mailto:uwe.dohse@tiptop-automotive.eu)

Your local contact



// ONE BRAND // ONE SOURCE // ONE SYSTEM

**TIP TOP Automotive GmbH**  
Walter-Rathenau-Ring 47 · 59581 Warstein-Belecke / Germany  
Phone: +49 2902 97732-0  
Fax: +49 2902 97932-50  
[www.tiptop-automotive.eu](http://www.tiptop-automotive.eu)  
Webshop: [www.tiptop-webshop.eu](http://www.tiptop-webshop.eu)

